


LEDline 2.0 - 30mm wide

- Fully encapsulated linear lighting fixture made of anodised aluminium.
- Standard lengths: 25, 50, 75 & 100cm
- Height: 30 or 40mm
- Special lengths: on request
- IP68
- 4x IK10: 80 Joule
- IP68 connection system
- Operating temperature: -25°C to 60°C
- Colours: Cold white 6100K
Neutral white 4100K
Warm white 2800K
Yellow
Red
Green
Blue
RGB
- Binning for white colours: 3 MacAdam
- CRI for white colours: 85
- Tension: 24Vdc
- Power ECO version: 3.5W/m
PLUS version: 7W/m
POWER version: 15W/m
- Power RGB ECO version: 9W/m
PLUS version: 18W/m
- Dimmable

White monocolour		LEDline h: 40mm		LEDline h: 30mm	
		Lumen/m	Lumen/W	Lumen/m	Lumen/W
ECO (3,5W/m)	Diffuse	76	22	137	39
	Clear	156	45	163	47
PLUS (7W/m)	Diffuse	173	25	287	41
	Clear	339	48	338	48
POWER (15W/m)	Diffuse	438	29	692	46
	Clear	801	53	822	55

The given data are typical values. Due to tolerances of the production process an the electrical components, light output values may vary.

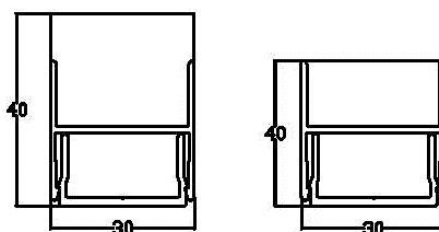

LEDdrain: for in-ground installation combined with drainage

- Standard version: stainless steel channel and resin concrete grating
- Made-to-measure products and other designs available: corten steel, galvanised, indirect lighting,...
- Load class: D400 for 30mm wide LEDline (lorries at low speed)
- Lengths: 100 & 50cm
- Complete with access units

